
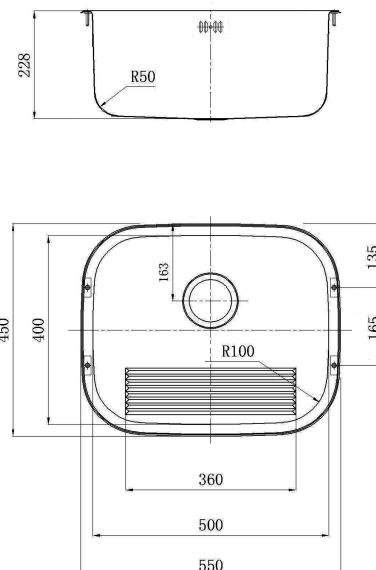


Utility sink TemptraWall

Art. no.	TEMPRA50-W
GTIN	8719585004908
Art. no.	TEMPRA50P
GTIN	8719585004861
Art. no.	TEMPRA50KV
GTIN	8719585004878



Utility sink TempraWall

Overall dimension in mm	550 x 450 x 228
Depth in mm	228
Bowl dim. in mm	500 x 400 x 230
Waste hole dim. in mm	90 (3,5")
Material	AISI 304
Material thickness in mm	0,8
Installation height in mm	900

Description

Utility sink in stainless steel, wall mounting. Supplied with stainless steel mounting brackets, waste kit and overflow.

Brackets:

Overall dimension in mm 330 x 330 x 13

Mounting hole dim. in mm Ø9

Material AISI 304

Material thickness in mm 1.5mm

Installation

Install the wastekit and the overflow to the sink. Put the square washer over the treads under the sink, slide the stainless steel bracket over the treads after this. Put the washer and the nut on the treads, and fasten the bracket by tightening the nuts. Mark the holes of the brackets on the wall and drill the holes. Fix the sink to the wall. Connect the waste outlet to the building plumbing.

Included in the box:

- * Basin
- * Brackets including nuts and washers
- * waste kit and overflow