


Shower panel ELD01P

Art. no.
GTIN

ELD01P
8719585004939

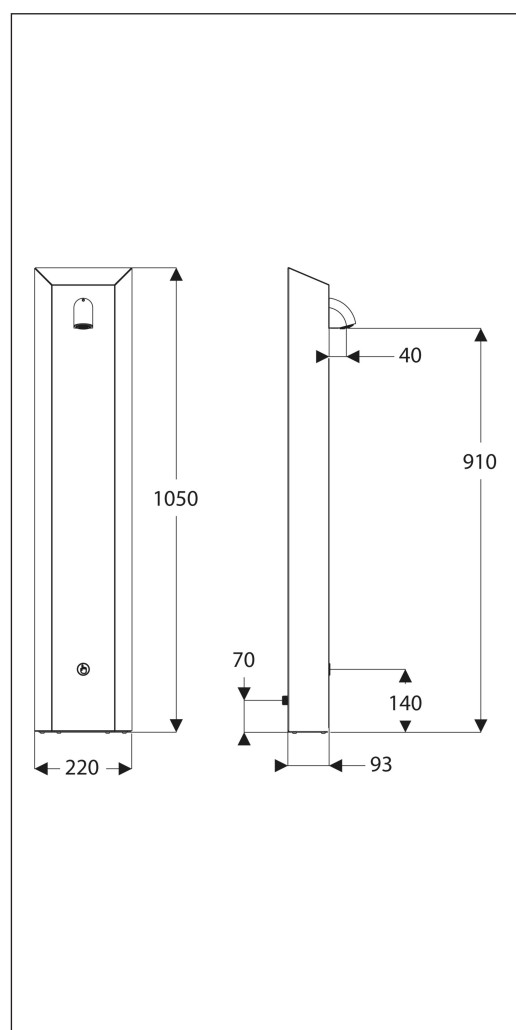

Shower panel ELD01P

| | |
|----------------------------------|---|
| Overall dimension in mm | 1050 x 93 x 220 |
| Material | Stainless steel 18/10, AISI304, 1.4301 |
| Material thickness in mm | 0,8 |
| Installation height in mm | 2100 |
| Gross weight in kg | 6.00 |
| Net weight in kg | 6.00 |
| V | 24 V DC |

Description

SS piezo shower panel for cold or premixed water, 24V DC

Shower panel in brushed stainless steel AISI304, with integrated Piezo electronics and electromagnetic valve. Fits perfectly in public shower rooms, such as schools and swimming pools, sports halls and prisons.

Water intake: G ½" - External thread

Water consumption: 6 l/m

Recommended water pressure: 1 – 6 Bar

Power input: 7W

The shower panel satisfies all requirements according to standards 73/02 / EEC and 89/336 / EEC

Installation

The shower panel can be connected to the electrical system in series, which is recommended in shower rooms with multiple showers to limit the need for maintenance.

When the touch button is activated with a light pressure, the shower starts to work. Flushing time is preset and can be programmed from 10 seconds to 310 seconds. The factory default preset flushing time is 120 seconds. If the user is finished by that time, the button can be touched again and the shower stops.

The shower panel can be programmed for regular flushing to prevent the growth of legionella bacteria. This is not preset from the factory. If desired, remote control for programming can be purchased separately.

Installation ELD01P

The shower panel can be connected to the electrical system in series, which is recommended in shower rooms with multiple showers to limit the need for maintenance.

When the touch button is activated with a light pressure, the shower starts to work. Flushing time is preset and can be programmed from 10 seconds to 310 seconds. The factory default preset flushing time is 120 seconds. If the user is finished by that time, the button can be touched again and the shower stops.

The shower panel can be programmed for regular flushing to prevent the growth of legionella bacteria. This is not preset from the factory. If desired, remote control for programming can be purchased separately.

The flush head can be adjusted to the desired angle.

